


# 3M 4000G/TR Module


## 4000G/TR Super-Mini Splicing Module

The 4000-G/TR connector module accepts a large variety of insulation and conductor diameters : 22-28 AWG (0.63mm - 0.32mm) The small size of the 4000G/TR connector module allows splice bundles to be smaller, improving housekeeping and reducing the costs associated with larger diameter closures

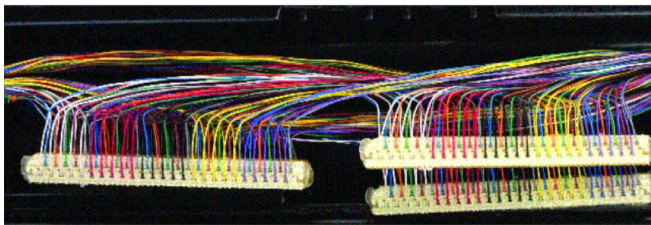

### Features

- New Gel Sealant technology
- Compliant with Cat.5 requirements
- Compatible with all 3M splicing equipment
- U-shaped contacts
- Front-side test entry ports
- Clear nodule covers and bases
- Craft-friendly design

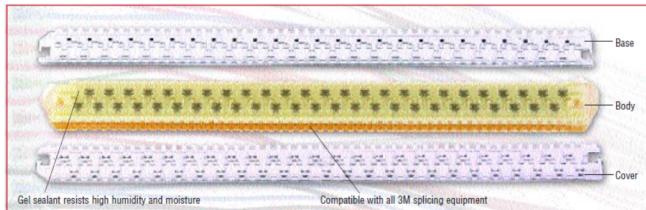

### Benefits

- Resists high humidity and enviromental elements,
- High-speed and high-bandwidth transmissions
- Reduces installation time and reworking demands
- Gas-tight, solder-equivqlent connections
- Enables teting without opening the module or interrupting service
- Enables easier pair identification and troubleshooting
- Requires minimal training

### Packaging

1 pack : 24 cs

5 packs : 1 Carton (120cs)

1 pack



5 packs



1 carton

